

HERMETIC SEALED DC CONTACTOR

EVH750

(H: 1500V Class)



◎ **Application (응용분야)** : Charging System, Battery Energy Storage System, Solar System, Fuel Cell Vehicle, etc.

◎ **Magnet coil ratings (코일정격)**

Nominal voltage (V)	Item	Inrush Coil current 150ms (Max.)	Holding Coil current	Pick-up voltage (V) max.	Drop-out voltage (V) min.	Holding voltage (V) min.	Max. voltage (V)	Remark
12S	12V	2.3A	0.45A	9VDC	6VDC	7.5VDC	18VDC	PWM economizer
24S	24V	1.1A	0.16A	18VDC	12VDC	15.0VDC	32VDC	
AS	12 to 36V	3.8A	0.15 to 0.4A	9VDC	6VDC	7.5VDC	36VDC	
BS	48V	0.45A to 0.7A	0.05A to 0.11A	32VDC	18VDC	22VDC	72VDC	

Notes : 1. Nominal current and coil resistance are measured at +20°C.


2. Differences of coil resistance are $\pm 10\%$.

3. Performance characteristic coil temperature is measured at +20°C.


◎ **Contact ratings (접점정격)**

Item	Type	1 Pole Resistor load
		EVH750
Max. Continuous current (wire size 480mm ²)		750A
Max. switching current		1000VDC 1000A
Contact rating switching voltages		1500VDC 800A
		12 to 1500VDC
Max. cut-off current		350VDC 2000A 10 Ops.
Voltage drop across contacts per 100A		30mV Max. (At 5VDC)
Min. permissible load		12VDC 0.5A
Description		S.P On/Off (a)
Contact Arrangement, auxiliary contacts		1Form A (SPST-NO.)
General Aux, Contact Current, Max.		2A 30VDC / 3A 125VAC
General Aux, Contact Current, Min.		100mA 8VDC
Gold alloy Aux, Contacts Max. (Low level circuit type)		0.1A 30VDC / 0.1A 30VAC
Gold alloy Aux, Contacts Min. (Low level circuit type)		1mA 5VDC / 1mA 5VAC

◎ **Ordering information (주문방법)**

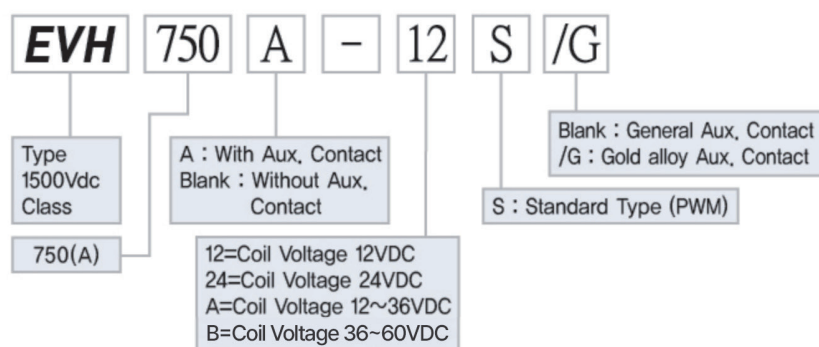

Permissible load of Aux, contact

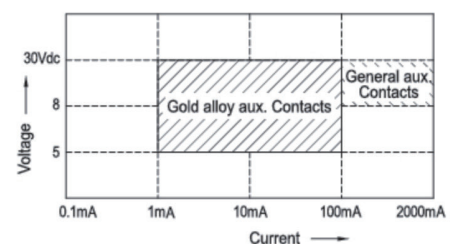

HERMETIC SEALED DC CONTACTOR

EVH750

(H: 1500V Class)


Characteristics (성능)

Expected life	Mechanical (Min.)		2×10 ⁵
	Electric (Min.) (Resistor)	500VDC 750A	2×10 ³
		750VDC 500A	2×10 ³
		1000VDC 500A	1×10 ³
		1000VDC 320A	6×10 ³
		1500VDC 250A	6×10 ³
Initial insulation resistance			Min. 200MΩ 1000VDC
Initial breakdown voltage	Between open contacts		4500VAC 60 Sec. 5mA
	Between contacts & coil		4500VAC 60 Sec. 5mA
Operate time (at 20°C)			Max. 50ms
Release time (at 20°C)			Max. 10ms
Shock resistance	Functional		Min. 196 m/s ² {20G}
	Destructive		Min. 490 m/s ² {50G}
Vibration resistance	Functional		98 m/s ² {10G} 10 to 500Hz
	Destructive		98 m/s ² {10G} 10 to 500Hz
Conditions for operation transport and storage	Ambient temperature		-40°C to +85°C
	Humidity		5 to 85% R.H.
Unit weight			1200g

Reference data (특성곡선)


온도상승곡선

- 통전시간의 최대치 Max. Current capacity
- Max. Continuous thermal current rating (amperes)

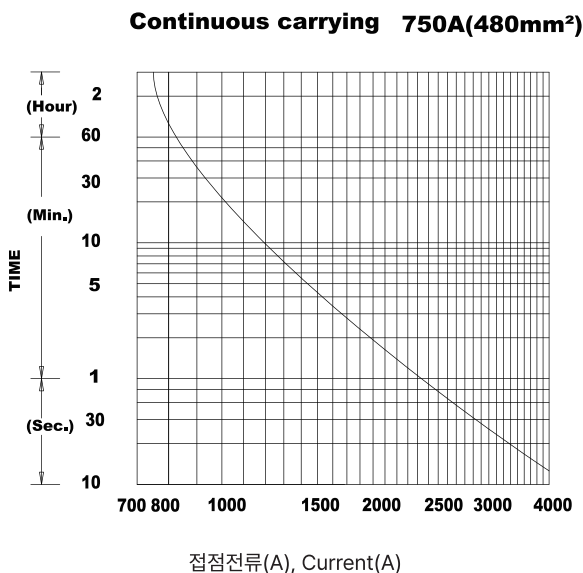

전기적 수명 곡선


(Estimated Switching Ratings)

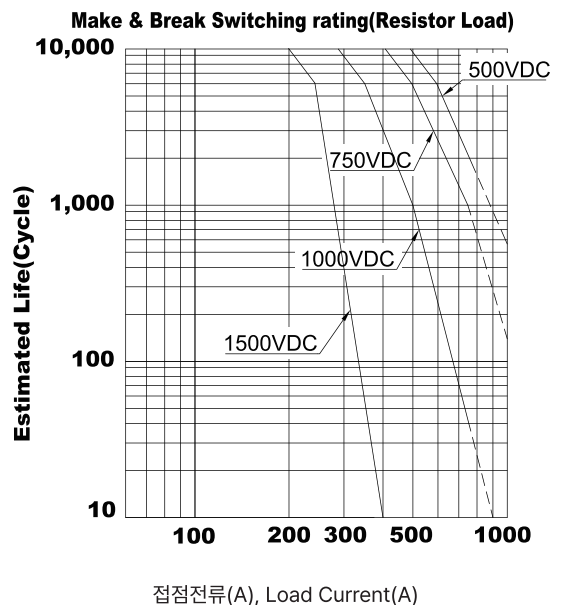



Dimension in mm (외형치수도)

Tolerance(공차) : 10mm 이하 ± 0.3 , 10~50mm ± 0.6 , 50mm 이상 ± 1.0

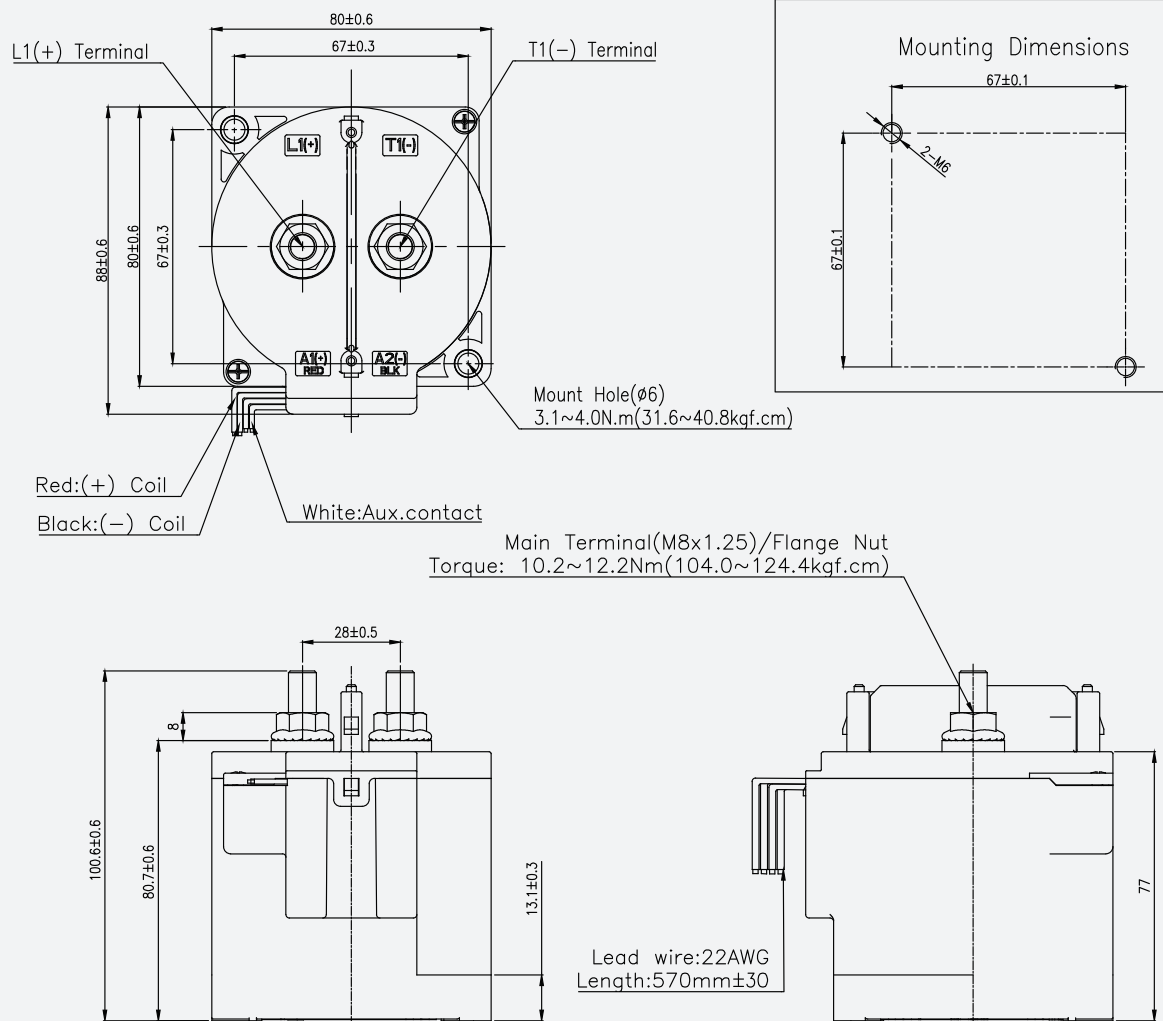

Schematic (Top View)

